

IST-QUADTEK® M530 LYNX High Temperature Color Camera Series

The IST-Quadtek M530 Series of Visible Light High-Temperature Color Cameras is designed to give you the flexibility to customize electronics, lenses, filters and other options to provide continuous monitoring of your high-temperature internal processes. Straight, oblique, or right angle lens tube options are available that offer more flexibility in mounting the camera. Add an M721 remote auto iris to adjust the camera iris from the comfort of the control room providing a clear picture from start-up to full load.

FEATURES/BENEFITS

- **Rotary Kilns and Coolers**
Provide continuous product quality monitoring. Observe ring formation, burner flame and product as it moves down the kiln or cooler. See potential upsets early.
- **Coal Fired Utility Boilers**
Monitor flame shape to adjust burners for maximum combustion and minimum fuel usage.
- **Bark Fired Boiler**
Observe fuel distribution, bed and feeder monitoring, combustion and flame characteristics.
- **Glass Melt Tanks**
View for flame impingement and monitor the crown for dripping. Easily see batch load, flow pattern and any un-melted surface material.



imaging systems


A Mirion Technologies Division

Featuring:

 **ist-quadtek**

SPECIFICATIONS AND PERFORMANCE

CAMERA	
Power Requirements	85-265 VAC, 47-440 Hz
Camera Detector	1/2" solid state color image sensor
System Resolution	>450 lines
Video	1.0 V p-p, 75 ohm, CCTV signal /VTN: RS170-NTSC or /VTP: CCIR-B-PAL video timing
Control	/AIN: Manual focus and iris adjustment on back /AIR: Remote iris adjustment with M721 Remote Auto Iris Controller

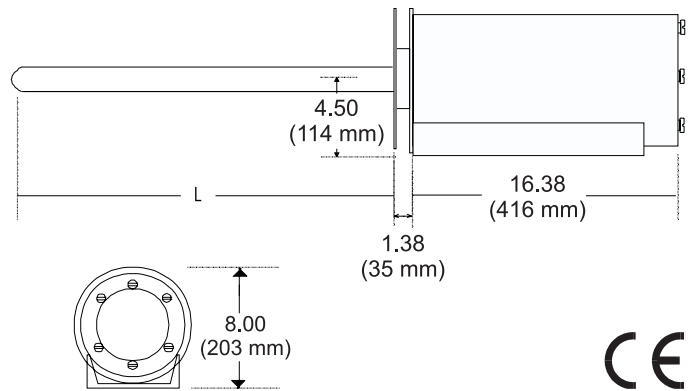

LENS	
Construction	Air or water cooled 304 stainless steel outer shroud. Sapphire window for maximum environmental protection.
Lens Options	/L: Straight view, /RAL: right angle with 90° offset optics, /OAL: oblique angle with 45° offset optics, /WCL: water cooled
Lengths	STD /L30: L=27.7" (704mm) or /OAL30: L=26.7" (678mm) Other lenses available. Please contact your sales representative.
Field of View	Wide: 75°H x 56°V Medium: 60°H x 45°V Narrow: 35°H x 26°V
Diameter	/L: 38mm (1.5") /RAL & /OAL: 51mm (2.0") /WCL: 57mm (2.25")
Cooling Requirements	Instrument quality air, 12-19 dm ³ /sec (25-40 SCFM) @ 5-15 psig (34-103 kPa) required for straight view lens (to ISO 8573-1, Class 1•7•2)
Environment	1621°C (2950°F) with proper cooling
Thermocouple	/TJ: Type J thermocouple option /TK: Type K thermocouple option

ENCLOSURE	
Construction	/CEI: Corrosion-resistant, insulated, air-cooled, NEMA 4; /CEW: Corrosion-resistant, water-cooled, NEMA 4
Cooling Type	/CCP: Air purged with check valve, 1 SCFM @ 2 PSI (0.5 dm ³ /sec @ 14 kPa) /CCV: Vortex cooling 13 dm ³ /sec @ 690 kPa (25 SCFM @ 100 PSI); Instrument quality air required.
Ambient Environment	Max. 60°C (140°F) with negligible radiant heat load. Water cooled option available to handle high radiant heat environment

MECHANICAL	
Video Output Jack	Female PL-259 "UHF" type
Power Input Jack	Removable waterproof miniplug (JOY type TP, female 3-conductor; mating power cord provided)
Enclosure Cooling Input	1/4" brass quick-disconnect nipple; mating coupler (Snaptite BVHC4-4F) provided
Lens Cooling Input	1/2" brass quick-disconnect nipple; mating coupler (Snaptite BVHC8-8F) provided
Weight	14kg (30 pounds) for air-cooled configuration (lens and camera)



315 Daniel Zenker Drive
200 IST Center
Horseheads, NY 14845
USA
T +1.607.562.4369
+1.800.432.1478
F +1.607.562.4392

Station Road
Alton, Hampshire
GU34 2PZ, UK
T 01420.541600
F 01420.541700

Kaiser-Konrad-Str 93a
D 53225 Bonn
Deutschland
T 0228.625088
F 0228.626300

© Copyright 2009. All rights reserved for trademark and registered trademark information.
Quadtek® is a registered trademark of Mirion Technologies Corporation.
The above specifications may vary according to system configuration.
Mirion Technologies Incorporated reserves the right to amend or change the information on this sheet without prior warning.
02/09

